


TCOM 416-01

BSC Filters Limited
10-11 Stirling Park, Bleriot Way
Clifton Moor, York, YO30 4WU. UK
Telephone: +44 (0) 1904 694250
E-mail: sales@bscfilters.com
Web-site: www.bscfilters.com

COMBLINE BANDPASS FILTER

Designed to cover UHF-2 Band, this filter provides low loss and flat group delay, for radios and point to point links in Maritime, Aeronautical and Programme making & Special Events (PMSE) bands.

Passband:	450 to 470 MHz
Insertion Loss:	1.0 dB max
Group Delay Variation:	100 nS max
Return Loss:	14 dB min
Rejection from DC to 395.5 MHz:	50 dB min
Rejection from 511.5 MHz to 2.0 GHz:	50 dB min
Power Handling:	2 W CW max
Operating temperature:	-40 to 70°C
Connectors:	TNC Female
External Finish:	Matt Black

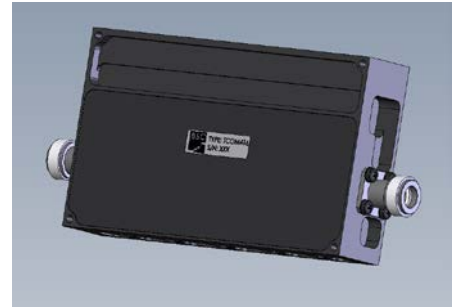

Outline:

